

M2/M2S



Ø 25mm

LED

IP 65



알루미늄 몸체의 우수한 디자인 제품

- 초고휘도 LED 점등으로 색채분별이 효과적
- 렌즈외관: 매끈형 및 체크형
- LED모듈 자율변경 가능, 변경시 공구필요없음
- 취부: 직접취부 혹은 판넬취부
- NPN/PNP, DC 12V/24V
- 재질: 렌즈-PC, 몸체-PC/ABS
- 보호등급 IP65

체크형

매끈형




소등시 점등시



소등시 점등시



의형도

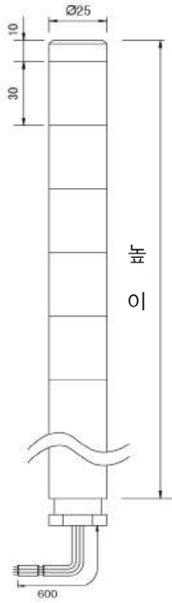

M2: 표준몸체

높이 (mm)
1단 : 240.0
2단 : 270.0
3단 : 300.0
4단 : 330.0
5단 : 360.0


M2S: 짧은몸체

높이 (mm)
1단 : 104.0
2단 : 134.0
3단 : 164.0
4단 : 194.0
5단 : 224.0



● 직접 설치




● 거치대 설치(22B Type)

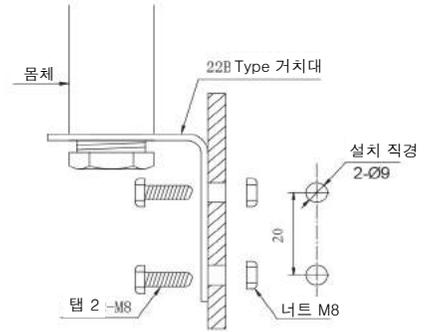

결선도

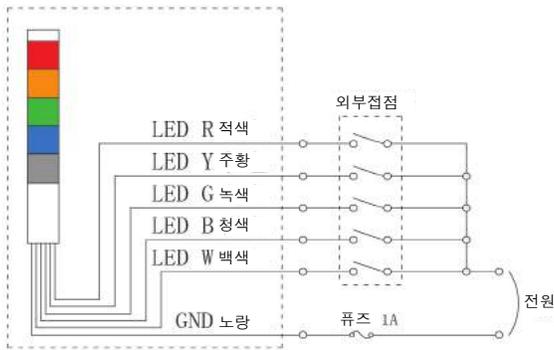

LED 모듈 색상	신호선 색상	전류
적색	적색	30mA
주황	주황	30mA
녹색	녹색	25mA
청색	청색	25mA
백색	백색	25mA



출력 Type (NPN/PNP)	
허용 전류	Ic ≥ 50mA
잔류 전압	Vc ≥ 35V
잔류 전류	< 0.1mA

전압	전류
사용 전압	1A

사양

Model : M2

단수	전압	LED 출력	무게
1	12V ≈	0.6W	0.20kg
	24V ≈		
2	12V ≈	1.2W	0.21kg
	24V ≈		
3	12V ≈	1.7W	0.22kg
	24V ≈		
4	12V ≈	2.3W	0.23kg
	24V ≈		
5	12V ≈	2.8W	0.24kg
	24V ≈		

Model : M2S

단수	전압	LED 출력	무게
1	12V ≈	0.6W	0.11kg
	24V ≈		
2	12V ≈	1.2W	0.12kg
	24V ≈		
3	12V ≈	1.7W	0.13kg
	24V ≈		
4	12V ≈	2.3W	0.14kg
	24V ≈		
5	12V ≈	2.8W	0.15kg
	24V ≈		

모델선정

