


Sensor Tester Kit



- Can have at least **25** applicable uses : Color sensors, Contrast sensors, Inductive sensors, Transparent films(double sheets)...




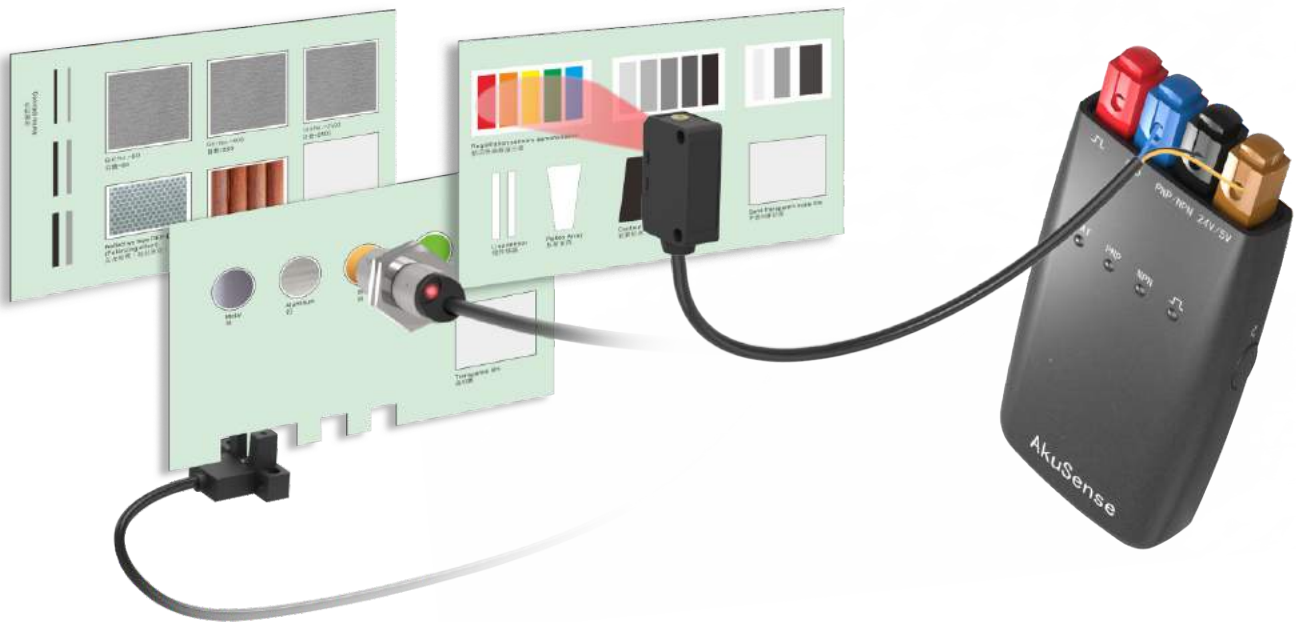

Appearance		
Test Type	NPN/PNP	Auto-Detect
Output Voltage	4.8~5.2V	5V Output
	23~24.5V	24V Output
Output Current	≤0.2A	5V Output
	≤0.15A	24V Output
Battery Capacity	2500mAh	
Theoretical Working Hour	10h	24V Output 15mA
Charging Time	6h	
Output Voltage for Charging External Device	4.8~5.2V	Portable Power Bank
Working Temperature	-10~45℃	
Weight	145g	
Size	125*62*23mm	
Others Functions	Silence Mode, Sleep Mode, Output Short-circuit Protection	
Model No.	WT-1	


Dimensions

Unit: mm

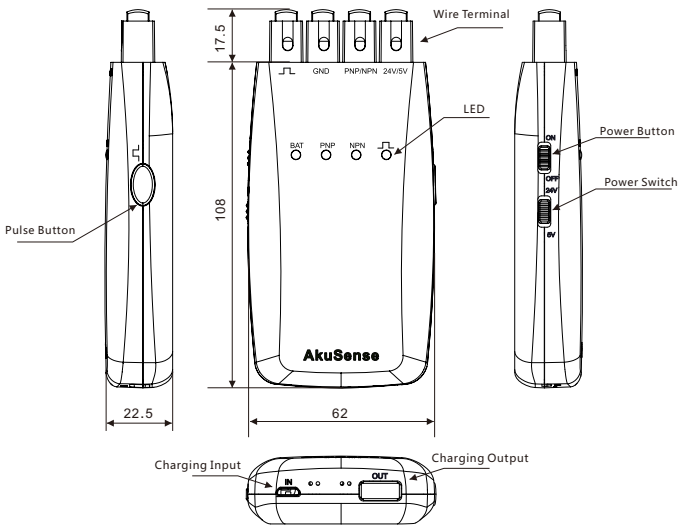


Circuit diagram

Three Wired:

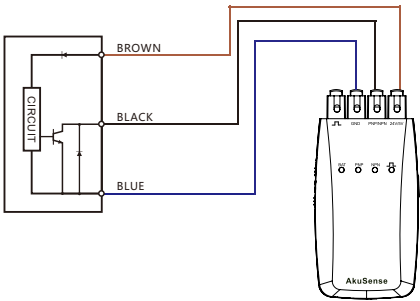

Two Wired:

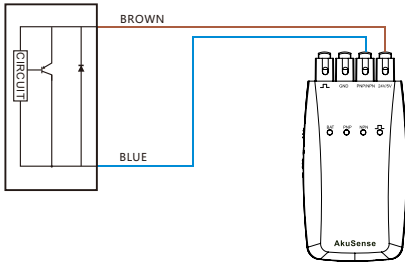

- Fiber Optic
- Slot Type
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Light Curtains
- Ultrasonic
- Connectivities

Tester